




10 mm AUTO TFMJ

V312422
180 GRS

After firing the cartridge is free from toxic exposure to barium, lead, mercury, antimony. It does not pollute the environment, does not endanger the shooter's health with combustion products, and does not leave harmful residue in the gun. It ensures safe shooting in closed premises and on target ranges. Unique patented primer design.

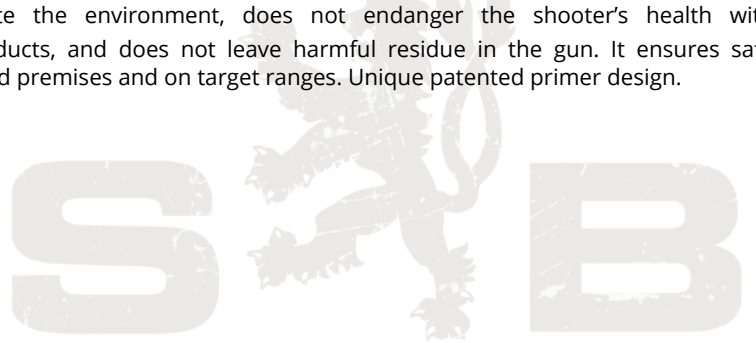

PROPERTIES

BULLET	TYPE	TFMJ	
	WEIGHT	grs	180
		g	11.70
	SECTIONAL DENSITY	lb/in ²	0.161
	MATERIAL OF JACKET	CuZn 10	
	NUMBER	2317	
BALLISTIC COEFFICIENT		G1	0.191
CARTRIDGE	WEIGHT	g	17.3
	LENGTH	mm	32.00
CASINGS		Factory Brass	
POWER FACTOR ESTIMATED		kgf-fps	209.7
+P AMMUNITION		No	
TEST BARREL LENGTH		mm	150
SUGGESTED USE		Range, Match/Competition	
FEATURES		Reliable Functioning, Non-expanding, No Barrel Leading	
PACKAGING			
BOXES PER CASE		20	
WEIGHT PER CASE		kg	18.6
		lb	41

BALLISTICS

DISTANCE	m	MUZZLE	25	50	100
VELOCITY	m/s	355	339	326	305
ENERGY	J	737	673	621	543
DISTANCE	m	12,5	25	50	100
POINTS OF IMPACT	cm	-0.1	0.0	-3.8	-29.2

