


38 SPL. WAD CUT.

WC V311002 148 GRS



Traditional lead bullet with a classic wadcutter profile. Wadcutter loads are extremely accurate and produce clean, easy to score target penetration.

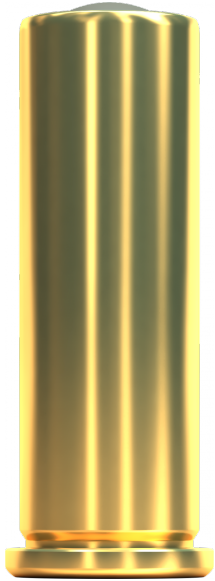

PROPERTIES

| | | | |
|------------------------|--------------------|--------------------|---|
| BULLET | TYPE | | WC |
| | WEIGHT | grs | 148 |
| | | g | 9.60 |
| | SECTIONAL DENSITY | lb/in ² | 0.166 |
| | MATERIAL OF JACKET | | - |
| | NUMBER | | N/A |
| BALLISTIC COEFFICIENT | | G1 | 0.059 |
| CARTRIDGE | WEIGHT | g | 14.3 |
| | LENGTH | mm | 30.20 |
| CASINGS | | | Factory Brass |
| POWER FACTOR ESTIMATED | kg-fps | | 103.5 |
| +P AMMUNITION | | | No |
| TEST BARREL LENGTH | mm | | 190 |
| SUGGESTED USE | | | Range, Match/Competition |
| FEATURES | | | Positive Functioning, Economical, 100% Lead |
| PACKAGING | | | |
| BOXES PER CASE | | | 24 |
| WEIGHT PER CASE | kg | | 18.8 |
| | lb | | 41 |

BALLISTICS

| | | | | | |
|------------------|-----|--------|-----|-------|-------|
| DISTANCE | m | MUZZLE | 25 | 50 | 100 |
| VELOCITY | m/s | 213 | 207 | 201 | 190 |
| ENERGY | J | 218 | 206 | 194 | 173 |
| DISTANCE | m | 12.5 | 25 | 50 | 100 |
| POINTS OF IMPACT | cm | 1.0 | 0.0 | -12.3 | -84.8 |

