


# 300 AAC BLACKOUT

## TXRG

V341842  
110 GRS



New generation lead free bullets Modern, highly efficient design incorporating a boat-tail base with a new, pointed tip for a flat trajectory and maximum retained energy. Blue plastic tip enhances expansion at all ranges while the solid copper construction maximizes weight retention.

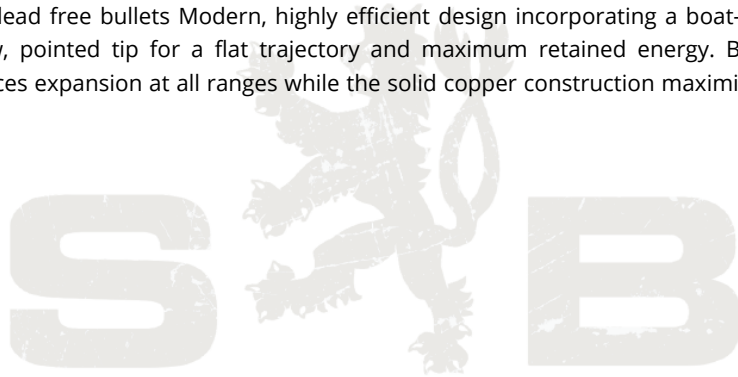

### PROPERTIES

BULLET	TYPE	TXRG
WEIGHT	grs	110
	g	7.10
	lb/in <sup>2</sup>	0.166
	MATERIAL OF JACKET	-
SECTIONAL DENSITY		
NUMBER		2973
BALLISTIC COEFFICIENT	G1	0.288
	G7	0.145
MRD	m	135
CARTRIDGE	WEIGHT	g 14.8
	LENGTH	mm 56.50
CASINGS		N/A
POWER FACTOR ESTIMATED	kgf-fps	243.7
+P AMMUNITION		No
TEST BARREL LENGTH	mm	410
SUGGESTED USE		N/A
FEATURES		N/A

### PACKAGING

BOXES PER CASE	50
WEIGHT PER CASE	kg 15.5
	lb 34.2

### BALLISTICS

DISTANCE	m	MUZZLE	100	200	300	400
VELOCITY	m/s	675	584	499	420	348
ENERGY	J	1,617	1,209	883	625	430
DISTANCE	m	50	100	200	300	400
POINTS OF IMPACT	cm	0.6	0.0	-24.1	-88.1	-208.5
POINTS OF IMPACT MRD	cm	2.3	3.5	-17.2	-77.7	-194.7

