


# 308 WIN.

## TXRG

165 GRS  
SB308XA



New generation lead free bullets Modern, highly efficient design incorporating a boat-tail base with a new, pointed tip for a flat trajectory and maximum retained energy. Blue plastic tip enhances expansion at all ranges while the solid copper construction maximizes weight retention.

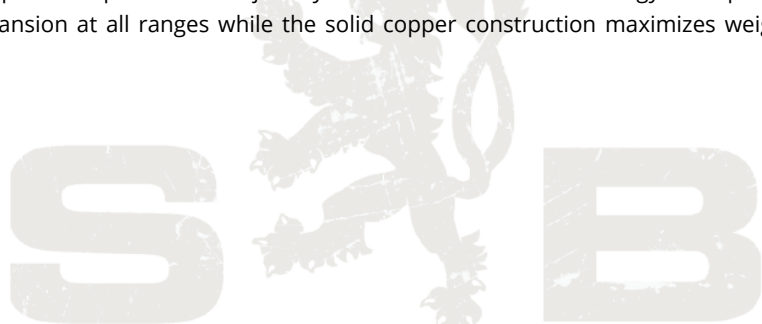

### PROPERTIES

| BULLET                 | TYPE               | TXRG                     |
|------------------------|--------------------|--------------------------|
|                        | WEIGHT             | grs 165                  |
|                        | DIAMETER           | in 0.308                 |
|                        | SECTIONAL DENSITY  | lb/in <sup>2</sup> 0.248 |
|                        | MATERIAL OF JACKET | -                        |
| BALLISTIC COEFFICIENT  | G1                 | 0.398                    |
|                        | G7                 | 0.200                    |
| CARTRIDGE              | LENGTH             | in 2.799                 |
| POWER FACTOR ESTIMATED | kgr-fps            | 448.8                    |
| TEST BARREL LENGTH     | in                 | 23½                      |
| SUGGESTED USE          |                    | N/A                      |
| FEATURES               |                    | N/A                      |

### PACKAGING

|                 |         |
|-----------------|---------|
| BOXES PER CASE  | 12      |
| WEIGHT PER CASE | lb 16.8 |

### BALLISTICS

| DISTANCE         | y     | MUZZLE | 100   | 200   | 300   | 400   |
|------------------|-------|--------|-------|-------|-------|-------|
| VELOCITY         | fps   | 2,720  | 2,493 | 2,276 | 2,071 | 1,877 |
| ENERGY           | ft-lb | 2,710  | 2,276 | 1,898 | 1,572 | 1,291 |
| DISTANCE         | y     | 50     | 100   | 200   | 300   | 400   |
| POINTS OF IMPACT | in    | -0.4   | 0.0   | -3.6  | -14.0 | -32.4 |

