


460 S&W MAG.

JHP V312242 255 GRS



Jacketed Hollow Point bullet. Standard 2 piece bullet construction designed for reliable feeding and function in a wide variety of firearms. An excellent defensive projectile.

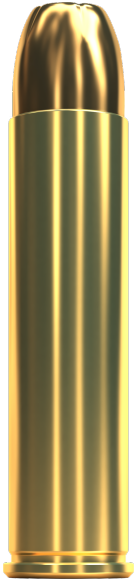

PROPERTIES

| | | | |
|------------------------|--------------------|--------------------|-------|
| BULLET | TYPE | JHP | |
| | WEIGHT | grs | 255 |
| | | g | 16.50 |
| | SECTIONAL DENSITY | lb/in ² | 0.178 |
| | MATERIAL OF JACKET | CuZn 10 | |
| NUMBER | | N/A | |
| BALLISTIC COEFFICIENT | | G1 | 0.197 |
| CARTRIDGE | WEIGHT | g | 30.1 |
| | LENGTH | mm | 57.00 |
| CASINGS | | N/A | |
| POWER FACTOR ESTIMATED | | kgf-fps | 448.5 |
| +P AMMUNITION | | No | |
| TEST BARREL LENGTH | | mm | 212 |
| SUGGESTED USE | | N/A | |
| FEATURES | | N/A | |

PACKAGING

| | |
|-----------------|---------|
| BOXES PER CASE | 12 |
| WEIGHT PER CASE | kg 8 |
| | lb 17.4 |

BALLISTICS

| | | | | | |
|------------------|-----|--------|-------|-------|-------|
| DISTANCE | m | MUZZLE | 25 | 50 | 100 |
| VELOCITY | m/s | 536 | 506 | 478 | 426 |
| ENERGY | J | 2,370 | 2,116 | 1,886 | 1,500 |
| DISTANCE | m | 12.5 | 25 | 50 | 100 |
| POINTS OF IMPACT | cm | -0.5 | 0.0 | -0.9 | -11.1 |

