


# 30-06 SPRING. FMJ

V340772  
124 GRS



Full Metal Jacket bullet. Standard lead core with a metallic jacket. Best for training and target shooting applications.

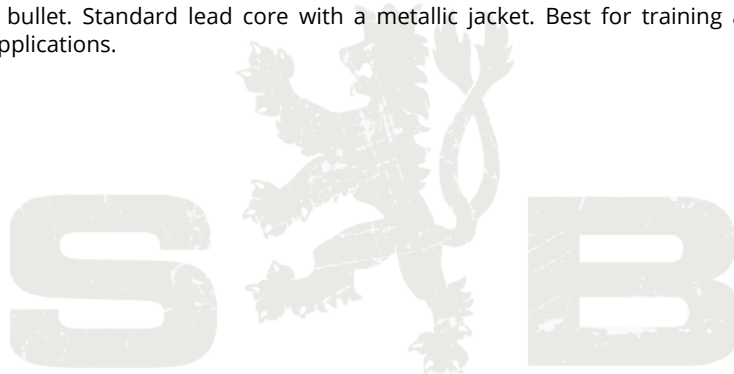

## PROPERTIES

|                        |                    |                    |       |
|------------------------|--------------------|--------------------|-------|
| BULLET                 | TYPE               | FMJ                |       |
|                        | WEIGHT             | grs                | 124   |
|                        |                    | g                  | 8.00  |
|                        | SECTIONAL DENSITY  | lb/in <sup>2</sup> | 0.187 |
|                        | MATERIAL OF JACKET | CuZn 10            |       |
|                        | NUMBER             | 2958               |       |
| BALLISTIC COEFFICIENT  |                    | G1                 | 0.379 |
|                        |                    | G7                 | 0.191 |
| MRD                    |                    | m                  | 191   |
| CARTRIDGE              | WEIGHT             | g                  | 24    |
|                        | LENGTH             | mm                 | 81.40 |
| CASINGS                |                    | N/A                |       |
| POWER FACTOR ESTIMATED |                    | kg-fps             | 384.0 |
| +P AMMUNITION          |                    | No                 |       |
| TEST BARREL LENGTH     |                    | mm                 | 600   |
| SUGGESTED USE          |                    | N/A                |       |
| FEATURES               |                    | N/A                |       |
| PACKAGING              |                    |                    |       |
| BOXES PER CASE         |                    | 20                 |       |
| WEIGHT PER CASE        |                    | kg                 | 10.8  |
|                        |                    | lb                 | 23.8  |

## BALLISTICS

|                      |     |        |       |       |       |       |
|----------------------|-----|--------|-------|-------|-------|-------|
| DISTANCE             | m   | MUZZLE | 100   | 200   | 300   | 400   |
| VELOCITY             | m/s | 944    | 860   | 779   | 703   | 631   |
| ENERGY               | J   | 3,565  | 2,955 | 2,427 | 1,975 | 1,592 |
| DISTANCE             | m   | 50     | 100   | 200   | 300   | 400   |
| POINTS OF IMPACT     | cm  | -1.0   | 0.0   | -8.3  | -32.9 | -77.4 |
| POINTS OF IMPACT MRD | cm  | 0.8    | 3.6   | -1.1  | -22.0 | -62.9 |

