


7 mm REM. MAG.

XRG V342662 158 GRS



S&B's original solid copper hunting bullet designed for deep penetration and high weight retention on the toughest game animals.

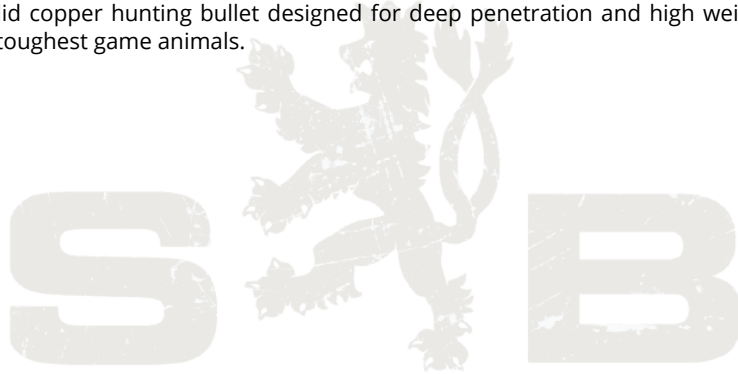

PROPERTIES

| | | | |
|------------------------|--------------------|--------------------|---|
| BULLET | TYPE | | XRG |
| | WEIGHT | grs | 158 |
| | | g | 10.20 |
| | SECTIONAL DENSITY | lb/in ² | 0.280 |
| | MATERIAL OF JACKET | | - |
| BALLISTIC COEFFICIENT | NUMBER | | 2968 |
| | | G1 | 0.265 |
| | | G7 | 0.133 |
| MRD | | m | 169 |
| CARTRIDGE | WEIGHT | g | 29.5 |
| | LENGTH | mm | 77.50 |
| CASINGS | | | Factory Brass |
| POWER FACTOR ESTIMATED | | kgf-fps | 448.9 |
| +P AMMUNITION | | | No |
| TEST BARREL LENGTH | | mm | 610 |
| SUGGESTED USE | | | Hunting |
| FEATURES | | | 100% Solid Copper, Reliable Functioning, Deep Penetration, Accurate |

PACKAGING

| | | |
|-----------------|----|-----|
| BOXES PER CASE | | 10 |
| WEIGHT PER CASE | kg | 6.8 |
| | lb | 16 |

BALLISTICS

| | | | | | | |
|----------------------|-----|--------|-------|-------|-------|--------|
| DISTANCE | m | MUZZLE | 100 | 200 | 300 | 400 |
| VELOCITY | m/s | 866 | 751 | 645 | 548 | 459 |
| ENERGY | J | 3,825 | 2,877 | 2,123 | 1,533 | 1,072 |
| DISTANCE | m | 50 | 100 | 200 | 300 | 400 |
| POINTS OF IMPACT | cm | -0.6 | 0.0 | -12.5 | -48.9 | -118.2 |
| POINTS OF IMPACT MRD | cm | 1.3 | 3.8 | -4.9 | -37.3 | -102.9 |

